
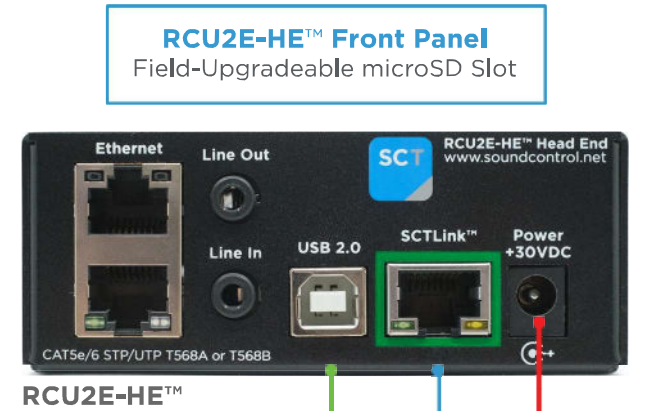


The **RCU2E-B00™** supports multiple camera models:

- 1Beyond IV-CAMFR-12
- 1Beyond AutoFramer
- AVer Cam550
- AVer TR313V2
- AVer TR530+
- VDO360 Saber20X
- VHD VX70IL
- 1Beyond AutoFinder
- AVer Cam520 Pro Advanced
- AVer Cam570
- AVer TR323NV2
- AVer TR333V2
- Sony SRG-XP1
- VHD VX710N
- 1Beyond IV-CAM-I12-B
- 1Beyond IV-CAM-I20-B
- Poly E60
- VHD VX120
- YeaLink UVC86

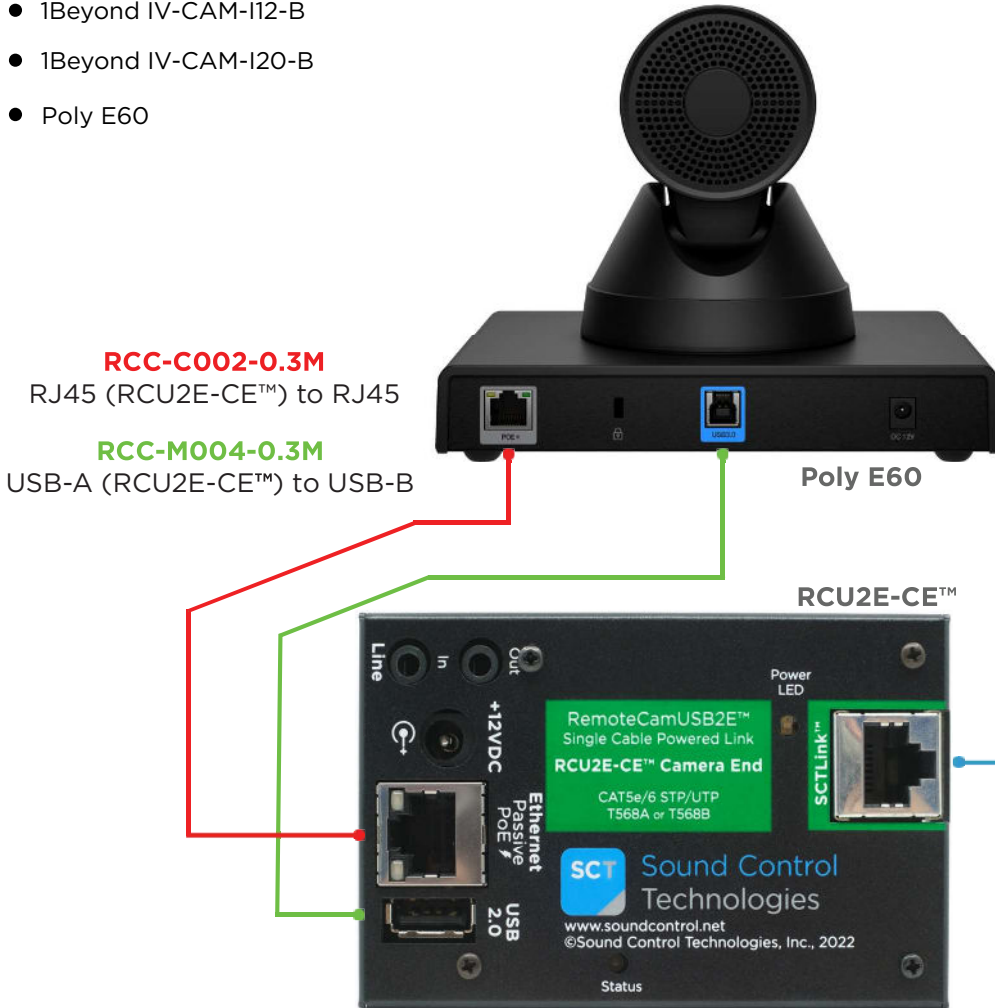

WPS-12 30VDC
100-240V 47-63Hz
Power Supply


SCTLink™ Cable
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

RCC-M004-1.0M
USB-B (RCU2E-HE™) to USB-A

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (100m Max Length)

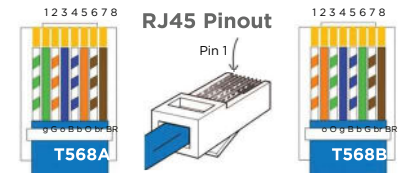

Module Dimensions

RCU2E-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2E-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)